



## Rugged, Handheld Flaw Detector

The EPOCH LTC digital ultrasonic flaw detector offers state-of-the-art technology in a compact and lightweight package. Based on the class-leading EPOCH XT, the EPOCH LTC is full featured, complies with the EN 12668-1 standard, and has various specialized options to meet your inspection needs.

Ultrasonic flaw detection is widely used in locating and sizing hidden cracks, voids, disbonds, and similar discontinuities in welds, forgings, billets, axles, shafts, tanks and pressure vessels, turbines, and structural components.

The EPOCH LTC features a bright, multi-color transfective, full-VGA (640 pixels x 480 pixels) display offering high-resolution A-scans and superior visibility in all lighting conditions, including direct sunlight. The EPOCH LTC is also designed for IP67 rating, ensuring that the instrument can perform in the harsh environments common in the inspection field.



The **New Generation** of  
EPOCH flaw detectors

### Features

- Designed for IP67 rating to ensure field ruggedness
- Complies with the EN12668-1 standard
- Only 960 g (2.1 lb)
- Full-color VGA display with transfective technology
- USB On-The-Go port for computer communication and direct printing
- Onboard and miniSD Card storage capabilities for the data logger
- Standard dynamic DAC/TVG
- Digital high dynamic range receiver with digital filters
- High-performance square wave pulser with tuning option

# Powerful Performance in a Compact Flaw Detector

The EPOCH LTC offers many standard features to meet your inspection needs. These include a square wave pulser, dynamic DAC/TVG, selectable digital filters, gain range from 0 dB to 110 dB, peak memory, 0.01 mm (0.001 in.) measurement resolution, and one gate with programmable alarms. In addition, the EPOCH LTC offers many optional, application-specific software features such as onboard DGS/AVG, AWS D1.1/D1.5 weld rating, manual PRF control, pulse width tuning, Gate 2, curved surface correction, and the GageView Pro interface program.

- Standard square wave pulser with PerfectSquare™ technology
- Digital receiver filtering: standard, broadband, low-pass and high-pass settings
- Four, fully customizable measurement displays to meet inspection needs. Select any Gate measurement for each display box
- Amplitude measurement resolution of 0.25% full screen height
- Auto-calibration for thickness, soundpath, or angular depth
- Amplitude measurement from 0% to 110% full screen height
- PRF rate automatically controlled from 10 Hz to 500 Hz. Manual control is optional
- Grid display modes
  - Standard 1 to 10
  - Soundpath
  - Leg mode for angle beam inspection
  - Selectable 100% or 110% vertical display

## Simplified Keypad Design

The EPOCH LTC features a simple keypad design that allows full control with the left or right hand for direct access to important functions. The keypad design also makes for rapid and easy parameter adjustments and recall of instrument configuration (CAL) files.

The keypad is available in English, international symbols, Japanese, and Chinese.

Four custom function keys allow operators to select preset values for instrument configuration parameters.



Hand strap can be moved for use with left or right hand

## Built for Tough Environments

The EPOCH LTC can withstand the rigors of field operation in harsh environments, from offshore to deserts.

Environmental Ratings	
IP rating	Designed to meet the standards of the Ingress Protection (IP) rating number IP67
Explosive atmosphere	Safe operation as defined by Class I, Division 2, Group D, as defined in the National Fire Protection Association Code (NFPA 70), Article 500, and tested using MIL-STD-810F, Method 511.4, Procedure I.
Shock tested	IEC 60068-2-27; 60 g, 6 ms H.S., 3 axes, 18 shocks total
Vibration tested	Sine vibration as per IEC 60068-2-6; 50 Hz to 150 Hz at 0.03 in. DA or 2 g, 20-sweep cycles
Drop tested	MIL-STD-810F, 4.5.5 Procedure IV-Transit drop. 48 in. drop onto 2 in. plywood surface backed by concrete. Drop on each face, edge, and corner for a total of 26 drops
Operating temperature	Lithium-ion: -10 °C to 50 °C (14 °F to 122 °F)
Battery storage temperature	0 °C to 50 °C (32 °F to 122 °F)
Recharge temperature range	0 °C to 40 °C (32 °F to 104 °F)
Battery compartment	Sealed – no tools necessary to replace battery
I/O door	Sealed I/O door for USB On-The-Go connection, miniSD Card slot, and VGA/RS-232 port

# Advanced Software Features and Data Management

**Standard dynamic DAC/TVG:** Calculates signal amplitude as a percentage or decibel level compared to a DAC curve or a reference echo amplitude fixed at a time-varied gain. DAC versions include ASME, ASME 3, JIS, and Custom. Also includes several key features: dynamically adjustable DAC curves, switchable DAC and TVG views, and custom DAC warning curves.

**DGS/AVG:** Flaw sizing technique allowing echo signals to be evaluated with a DGS/AVG diagram associated to a particular type of probe and material. The DGS/AVG diagram illustrates the relationships between echo height, flaw size, and distance from the transducer

**Gate 2 (Echo-to-Echo):** Allows Gate 2 measurements, Echo-to-Echo measurements, and Gate 2 alarms

**CSC (Curved Surface Correction):** Corrects sound path information when using an angle beam transducer to circumferentially inspect a curved surface.

## Software Options

**Manual PRF control:** Allows operators to manually adjust the EPOCH LTC's pulse repetition frequency (PRF) from 10 Hz to 500 Hz in 10-Hz increments

**Extended range:** Extends the standard range of the EPOCH LTC to 4 mm to 10000 mm (0.144 in. to 400 in.)

**Tunable square wave pulser:** Allows operators to tune the pulse width of the square wave pulser to optimize transducer performance. This maximizes signal-to-noise ratio and penetration in difficult materials.


**AWS D1.1 and D1.5:** Provides a dynamic reflector indication rating for various AWS weld inspection applications. This allows more efficient inspections by eliminating manual calculations .

**API 5UE:** Allows defect sizing according to API Recommended Practice 5UE. Uses the Amplitude Distance Differential Technique (ADDT) to measure the size of potential defects during the prove-up process of OCTG pipe. The measurement process is simple and repeatable since all ADDT variables are captured from a Peak Memory envelope.



## Instrument Inputs/Outputs

USB	USB On-The-Go port for PC communication, printing, and data storage.
VGA output port	Standard
miniSD	miniSD Card slot for data storage.
RS-232 port	Yes
Data Storage	Capable of storing up to 50,000 IDs with waveforms, measurements, and configuration parameters in the onboard memory. The miniSD Card allows virtually unlimited data storage.

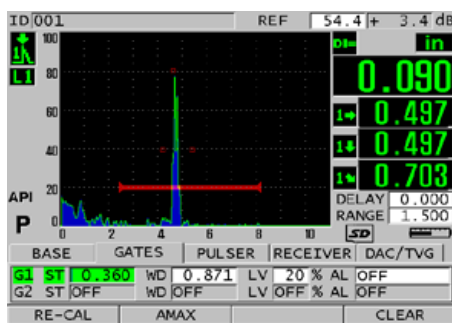

Software option API 5UE allows defect sizing according to API Recommended Practice 5UE

## GageView Pro

The optional GageView™ Pro interface program helps manage and format stored inspection data. Data can be printed or easily copied to word processing files and spreadsheets for further reporting needs. GageView Pro also allows creating customized databases of identifier (ID) strings that can be uploaded to the EPOCH LT, XT, 600 and the 1000 Series.

With GageView Pro operators can:

- Export thickness or amplitude data saved on the EPOCH to Microsoft Excel, Word, or similar programs
- Create, format, and manage test databases
- Import and export configurations between the EPOCH and a computer
- Create custom DGS probe libraries
- Upgrade the EPOCH operating software

# EPOCH LTC Specifications\*

General	
Dimensions (W x H x D)	128.9 mm x 223.3 mm x 55.1 mm (5.07 in. x 8.79 in. x 2.17 in.)
Weight	960 g (2.12 lb) with Li-ion battery
Keypad	English, international symbols, Japanese, or Chinese
Display languages	English, Spanish, French, German, Italian, Japanese, Chinese, Russian, Norwegian, Swedish
Transducer connection	LEMO 00
Battery	Rechargeable Lithium-ion. Standard AA battery tray
Battery operating time	Lithium-ion rechargeable battery: 8 hours; AA Li-FeS <sub>2</sub> : 6 hours AA NiMH cells: 4 hours; AA alkaline cells: 3 hours
Power compatibility:	100/120 VAC, 200/240 VAC, 50-60 Hz
Display type	Color transreflective LCD, refresh rate of 60 Hz, user-selectable color schemes and brightness, two split-screen modes and one full-screen mode
Display dimensions (W x H)	640 pixels x 480 pixels, 75 mm x 56 mm (2.95 in. x 2.21 in.), 94 mm (3.7 in.) diagonal
Pulser	
Pulser	Fixed width square wave pulser optimized for general flaw detection applications
Pulse width	Fixed width in base instrument. Adjustable from 25 ns to 5,000 ns (0.1 MHz) with EPLTC-SWP option
Pulse repetition frequency (PRF)	Automatically software controlled over the range of 10 Hz to 500 Hz. Manual PRF control option available
Energy settings	100 V to 400 V in 100 V increments
Damping	50 Ω, 100 Ω, 200 Ω, 400 Ω
Receiver	
Gain	0 dB to 110 dB — Two user-defined gain step adjustments and presets
Total instrument bandwidth	0.2 MHz to 26.5 MHz at -3 dB
Digital filter settings	<b>Standard:</b> 0.2 MHz to 10.0 MHz <b>Broadband:</b> 2.0 MHz to 21.5 MHz <b>Low Pass:</b> 0.5 MHz to 4.0 MHz <b>High Pass:</b> 8.0 MHz to 26.5 MHz
Rectification	Full wave, positive half wave, negative half wave, RF
System linearity	Horizontal: ±0.2% FSW Vertical: 0.25% FSH, amplifier accuracy ±1 dB
Amplitude measurement	0 to 110% full screen height with 0.25% resolution
Reject	0% to 80% full screen height with visual warning
Measurement rate	Equal to PRF in all modes
Calibration	
Automated calibration	Velocity, Zero Offset Straight Beam (First Backwall or Echo-to-Echo) Angle Beam (Soundpath or Depth)
Test modes	Pulse Echo, Dual, or Through Transmission
Units	Millimeters, inches, or microseconds
Range	Base instrument: 4 mm to 5000 mm (0.144 in. to 200.000 in.)
Extended range option	4 mm to 10000 mm (0.144 in. to 400.000 in.)
Velocity	635 m/s to 15240 m/s (0.0250 in./μs to 0.6000 in./μs)
Zero offset	0 μs to 750 μs
Display delay	59 mm to maximum range (-2.323 in. to maximum range)
Refracted angle	10° to 85° in 0.1° resolution
Measurements	
Types	Thickness, Soundpath, Projection, Depth, Amplitude, Time-of-Flight for Gate 1
Gate 1	Measures Echo height and Time-of-Flight.
Gate 2 option	Allows Echo-to-Echo measurements regardless of Gate 2 measurements and Gate 2 alarms.
Measurement display locations	User selects up to four measurements from either gate to be displayed on the live screen.
Dynamic DAC/TVG	Standard
DAC points	Up to 50 points, 110 dB dynamic range
Special DAC modes	20-80% DAC, Custom DAC (up to 6 curves)
Gate start	Variable over the entire displayed range.
Gate width	Variable from Gate start to the end of displayed range.
Gate height	Variable from 2% to 95% full screen height.
Alarms	Positive and negative thresholds, minimum depth.

## Standard PACKAGE

The EPOCH LTC package includes:

**EP-MCA (U8050397):** AC adaptor

**EPLTC-TC (U87640009):** Transport case

**910-266:** Instrument user's manual

**EPLTC-HS (U8780043):** Hand strap

**EPLTC-BAT-L (U8760002):** Lithium-ion rechargeable battery

**EPLTC-BAT-AA (U8760001):** AA battery cell tray

**Warranty:** One-year limited warranty.

## Instrument I/O cables

**EPLTC-C-USB-A-6 (U8840031):** USB-to-Host PC

**EPLTC-C-USB-B-6 (U8840033):** USB-to-Client printer

**EPLTC-C-RS232-6 (U8840029):** RS-232 cable (1.83 m/6 ft)

**EPLTC-C-VGA-6 (U8840035):** VGA cable (1.83 m/6 ft)

## Options

**EPLTC-EW (U8778333):** Extended warranty for one additional year

## Software Options

**EPLTC-PRF (U8140067):** Manual PRF control

**EPLTC-RANGE (U8140065):** Extended range

**EPLTC-SWP (U8140093):** Tunable square wave pulser

**EPLTC-AWS (U8140063):** AWS D1.1/D1.5

**EPLTC-API 5UE (U8140140):** API 5UE

**GAGEVIEWPRO-KIT-USB-A-AB (U8140076):** GageView Pro

## Optional Accessories

**EPXT-EC:** External smart battery charger

**EP4/CH (U88140055):** Chest harness

**EPLTC-RPC (U8764008):** Rubber protective case with pipestand

**EPLTC-DP (U8780042):** Clear display protectors (10)

OLYMPUS NDT INC. is ISO 9001 certified.

**OLYMPUS**

**OLYMPUS NDT INC.**

48 Woerd Avenue, Waltham, MA 02453, USA, Tel.: (1) 781-419-3900  
12569 Gulf Freeway, Houston, TX 77034, USA, Tel.: (1) 281-922-9300

**OLYMPUS NDT CANADA INC.**

505, boul. du Parc-Technologique, Québec (Québec) G1P 4S9, Tel.: (1) 418-872-1155  
1109 78 Ave, Edmonton (Alberta) T6P 1L8

[www.olympus-ims.com](http://www.olympus-ims.com)

[info@olympusndt.com](mailto:info@olympusndt.com)

Epoch LTC\_EN\_201006 • Printed in the USA • Copyright © 2010 by Olympus NDT.

\*All specifications are subject to change without notice.

All brands are trademarks or registered trademarks of their respective owners and third party entities.

